




**DESIGN-AIRE – Fan Filter Module – SLIM LINE SERIES**

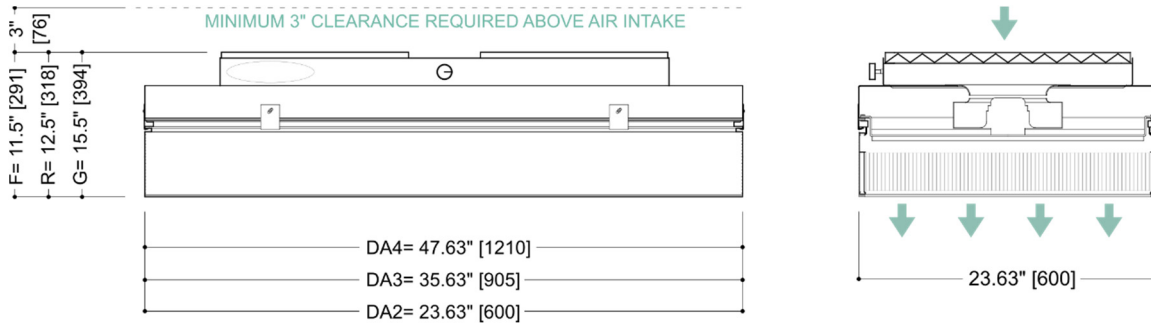

Model Number:  -  -  -  -  -  -  -

Length      Volts      Filter Media      Model Series      Motor Type      Filter Frame      Flow Direction      Certification

Length	Volts	Filter Media	Motor Type	Filter Frame	Flow Direction	Certification
DA4 (4')	1 (115 V)	H (HEPA)	AC (AC Motor)	F (Standard)	D (Standard)	T (ETL – North America)
DA3 (3')	2 (230 V)	U (ULPA)	EC (EC Motor)	R (Room side replaceable)	V (Reverse)	M (CE – Europe)
DA2 (2')				G (Pharmaseal 9")		K (RoHS – International)

**STANDARD DESIGN-AIRE FEATURES:**

- ✓ Durable aluminum housing
- ✓ HEPA filter rated 99.99% efficient at 0.3µ (Alternate, ULPA filter rated 99.995% efficient at 0.12 µ)
- ✓ ISO 5 (Class 100) conditions
- ✓ Convenience outlet for connecting multiple units
- ✓ 2 year limited warranty on parts and labour

**OPTIONAL FEATURES:**

**Pre-filters**

- 1" high, disposable pre-filters, MERV 8 (default)
- 2" high, disposable pre-filters, MERV 8
- No pre-filters

**Housing Material**

- Aluminum (default)
- Painted, Silver
- Painted, White
- Stainless Steel

**Power Entry**

- 15' long power cord, 3-prong plug end (default)
- C14 power entry connection, no cord provided
- C14 power entry connection, C13 cord 10', no plug end

**Accessories**

- Drywall ceiling mounting flange
- Speed control tamper proof cover
- Minihelic gauge for filter load monitoring, range 0-1" WG
- Sound insulation package
- Ceiling suspension eyebolts
- Remote wiring kit, for EC motors only
- Remote speed control panel, for RSR units only
- Duct transition connection (order separately, see Transitions cutsheet)

Notes / Comments:

Customer Signature

Date